

**UX**  
SERIES



**ElectroMech**



## Electric Walkie Stacker

MSL15WUX / 1500kg

# UX Series - Electric Walkie Stacker

**MSL15WUX / 1500kg**

The Yale® electric walkie stacker MSL15WUX is designed with productivity and flexibility in mind for the operator. It combines operator friendly controls for easy manoeuvrability, with added technology features to help users maximise their time.

## Productivity


- Maintenance free AC motors
- Multi-function display with BDI and hour meter
- Handle equipped with emergency reversing button
- Auto deceleration function
- Low speed switch
- Variable speed control
- Sideways battery removal with rollers
- Mast cushioning for low-noise operation
- Built-in pressure relief valve protects from overloads
- Emergency power disconnect switch
- 240Ah traction battery
- Cold storage configuration (option)
- Narrow leg option for Australian market

## Optimum Structural Design

- Low centre of gravity enhances stability
- Full free lift mast options for low overhead clearance
- Durable plastic covers
- Adjustable balance caster wheel improves stability

## Load Charts

### Load Centre Chart

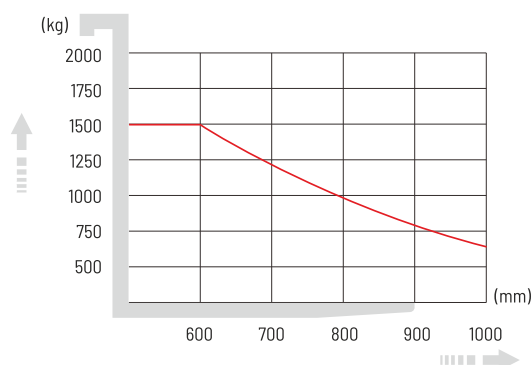

## Serviceability

- Low voltage protection setting extends the battery life
- CANbus technology
- Simple electronic components makes troubleshooting and servicing more efficient
- Hall effect sensors reduce wear and increase component life




Handle (Standard)  
(Left & Right Handed)



Adjustable  
Straddle Legs






One Sided (Cold Store)



Two Sided (Cold Store)

### Load Capacity Chart

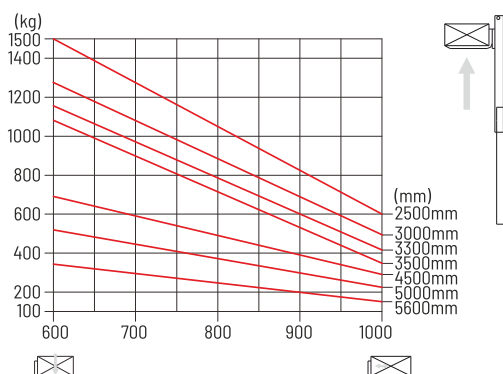

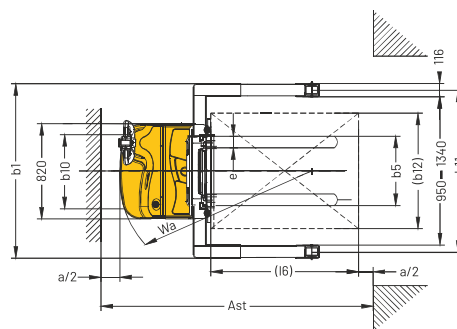

## Specifications and Dimensions

Model	Measurement	MSL15WUX						
Load capacity	Q (kg)	1500						
Load centre distance	c (mm)	600						
Load distance, centre of drive axle to fork	x (mm)	697						
Fork height, lowered	h13 (mm)	70						
Wheelbase	y (mm)	1420						
Axle loading, laden front/rear	kg	1440/1280						
Axle loading, unladen front/rear	kg	870/350						
Tyres		polyurethane						
Tyre size, front	mm	250×70						
Tyre size, rear	mm	80×84						
Additional wheels (dimensions)	mm	150×60						
Wheels, number front rear (x=driven wheels)		1x+1/4						
Tread, front	b10 (mm)	520						
Tread, rear	b11 (mm)	1040-1430						
Mast height lowered	h1 (mm)	1805	2055	2205	2305	2120	2280	2480
Free lift	h2 (mm)	1300	1550	1700	1800	1570	1740	1940
Max. lift height	h3 (mm)	2500	3000	3300	3500	4500	5000	5600
Mast height extended	h4 (mm)	3025	3525	3825	4025	5080	5560	6160
Height of tiller in drive position min./max.	h14 (mm)	670/1300						
Overall length	l1 (mm)	1980						
Length to face of forks	l2 (mm)	915						
Overall width	b1 (mm)	1170-1560						
Fork dimensions	s/e/l (mm)	40/100/1070 (1150)						
Width overall forks	b5 (mm)	200-800						
Ground clearance, centre of wheelbase	m2 (mm)	35						
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2480						
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2465						
Turning radius	Wa (mm)	1610						
Drive motor power	kW	1.2						
Lift motor power	kW	3						
Sound lever at the driver's ear according to DIN12503	dB (A)	70						
Travel speed, laden/unladen	Km/h	5.8/6						
Lift speed, laden/unladen	m/s	0.11/0.15						
Lowering speed, laden/unladen	m/s	0.12/0.12						
Max. gradeability, laden/unladen	%	8/15						
Service brake		Electromagnetic						
Battery voltage, nominal capacity K5	V/Ah	24/240						
Battery weight	kg	240						
Battery dimensions l/w/h	mm	675x254x500						
Service weight (without battery)	kg	1180/1205/1220/1230/1280/1300/1320						

## MSL15WUX Power Plug Type




**A**  
Power Plug



**F**  
Power Plug



**G**  
Power Plug



**I**  
Power Plug

## About ElectroMech Lift Trucks

ElectroMech and Hyster-Yale® have entered into an agreement for the sales and service of the Yale® brand of forklifts and lift trucks in India, which is being provided through a dedicated company - ElectroMech Lift Trucks Pvt. Ltd. The ElectroMech Yale association benefits from the leadership position of ElectroMech in the Indian market and its dependable service support. It is further bolstered by the global technologies from Hyster-Yale®.

ElectroMech Lift Trucks Pvt. Ltd. is a 100% subsidiary of its parent company ElectroMech and, with state-of-the-art facilities, is solely dedicated to the lift truck business.



**ElectroMech** **Yale®** 

*Corporate Office & Plant*

### **ElectroMech Lift Trucks Pvt. Ltd.**

Gat No. 316, At post Kasar Amboli,  
Tal. Mulshi, Dist. Pune 412 115 INDIA

Telefax : +91-20-6654 2222

E-mail : [yale@emech.in](mailto:yale@emech.in)

### **Yale Pacific**

1/23 Rowood Road, Prospect NSW 2145

Tel: +61 (2) 9795 3800 | Fax: +61 (2) 9792 8484


[yale.com/pacific/en-au](http://yale.com/pacific/en-au)

### **Yale Asia**

16 Tuas Avenue 20, Singapore 638827

Tel: +65 6863 3387 | Fax: +65 6863 3349

[yale.com/asia/en-sg](http://yale.com/asia/en-sg)

© 2024 Hyster-Yale Group, Inc., all rights reserved. YALE and **Yale**  are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and / or features not available in all regions.



[www.emechiale.in](http://www.emechiale.in)